

Vehicle Security / Remote Start / Remote Access System Installation

CONTENTS

VEHICLE PREPARATION

Hood Switch Installation

INSTALLATION

VSS Module Installation

Security Indicator LED Mounting

TPM Antenna Kit Installation

RMST Kit Antenna Installation

RMU Module Installation

GENERAL PROCEDURES

Learn VSS to vehicle

Shock Sensor Sensitivity Adjustment

Standard Remote Start Activation


RMU Remote Start Activation

RMU Activation


INSTALLATION

Vehicle Security / Remote Start / Remote Access - F-150

VSS System Components

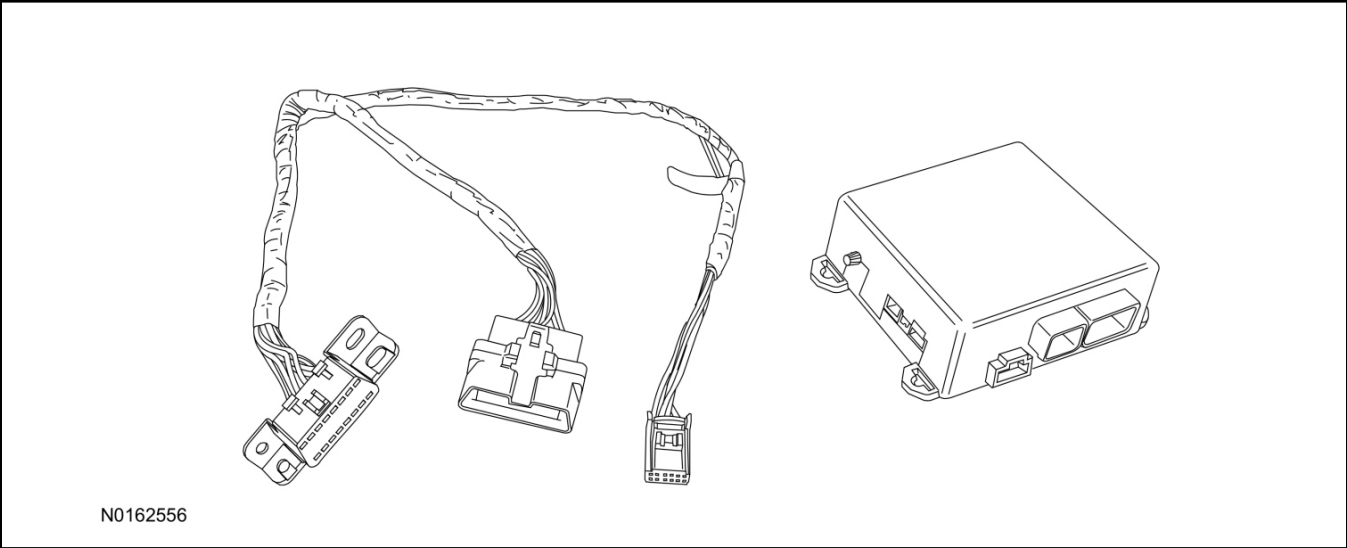

Security Indicator LED (19D596) "Optional"

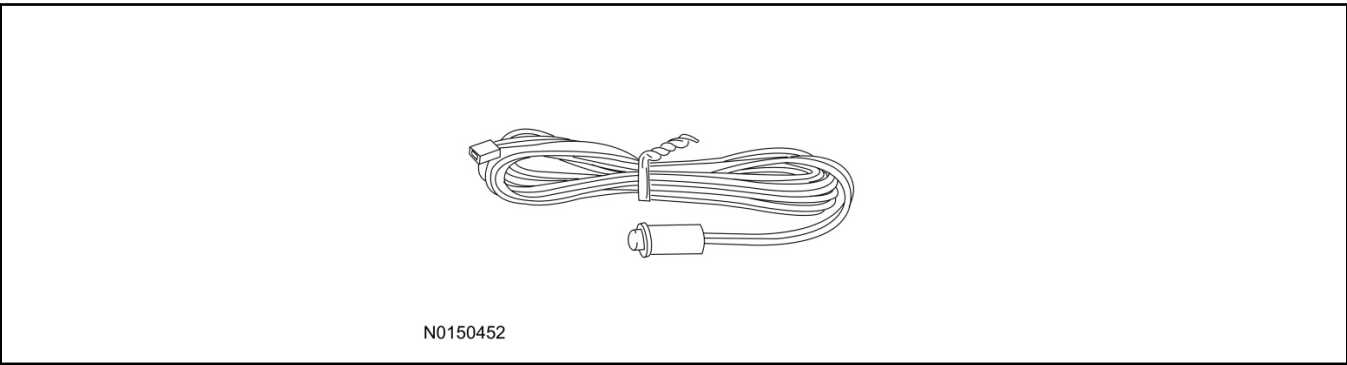

F-150

1. Verify correct kit number.

Review VSS Kit Contents

NOTE:

Kits are vehicle specific and are not interchangeable.

2. Review the VSS kit contents.

Vehicle Security System (VSS) Kit

QUANTITY	DESCRIPTION
1	VSS Module
1	T-harness

INSTALLATION (Continued)**Vehicle Security System (VSS) Kit(Continued)**

6	Tie-straps
1	Owner's Manual

Security Indicator LED Kit Contents "Optional"

3. Review the Security Indicator LED kit contents.

Security Indicator LED Kit

QUANTITY	DESCRIPTION
1	Security Indicator LED


I. VSS System Installation**⚠ CAUTION:**

Carefully route and secure module and harnesses so that they do not interfere with moving parts or linkages.

NOTE:

If the VSS kit was installed previously and the vehicle is being upgraded, proceed to the "RMST" or "RMU" upgrade section(s).


4. Remove the 2 bolts and remove the OBD II port from the IP frame.

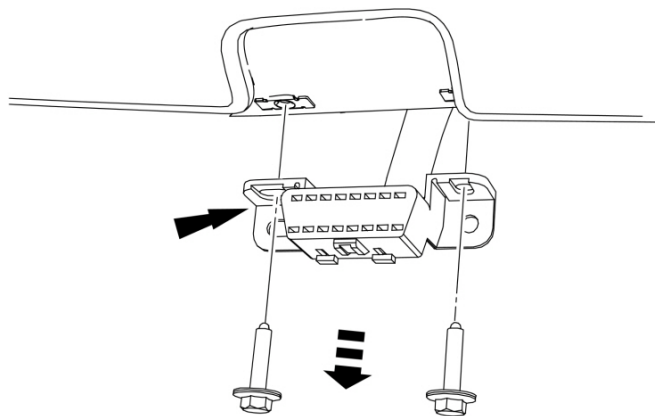

N0151222

INSTALLATION (Continued)


5. Connect the VSS T-harness to the OBD II port.
 - Secure the T-harness to the OBD II port using a tie-strap.

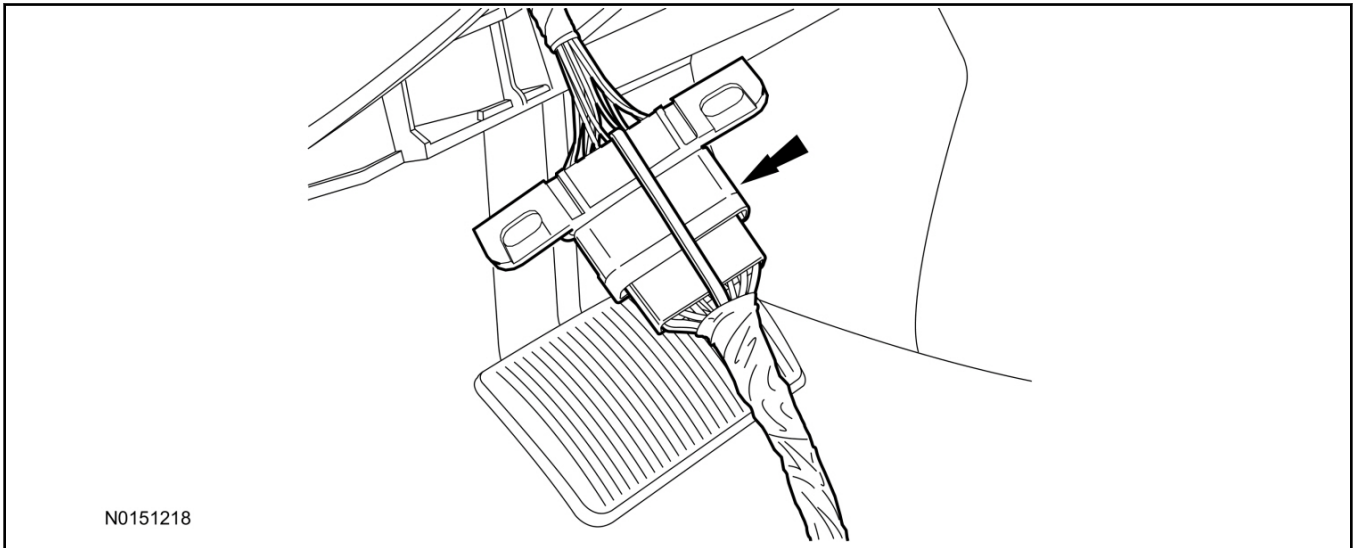


6. Position the VSS harness inside the IP being careful to avoid sharp edges and moving parts.
7. Install the new VSS harness OBD II port to the IP frame and install the bolts.
 - Do not over tighten.
8. Remove the LH Instrument Panel (IP) side finish panel.

INSTALLATION (Continued)

9. Position the VSS module on top of the A/C duct located behind the LH IP side finish panel and secure with tie-straps.
- Ensure the VSS module is positioned so the shock sensor adjustment knob can be accessed for later use.
 - Ensure the tie-strap is routed through the VSS module loops at opposite corners.

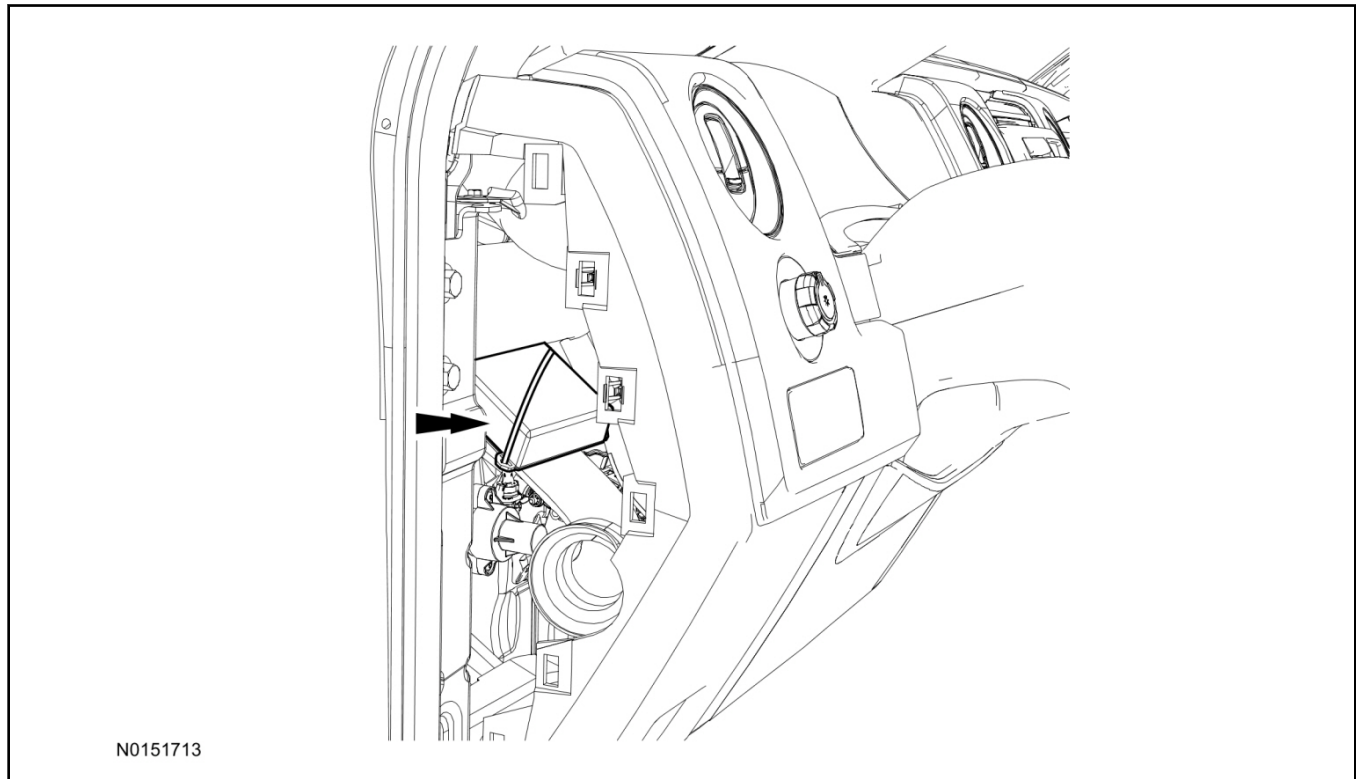


10. Connect the VSS harness to the VSS module.
- Secure the VSS harness with tie-straps.

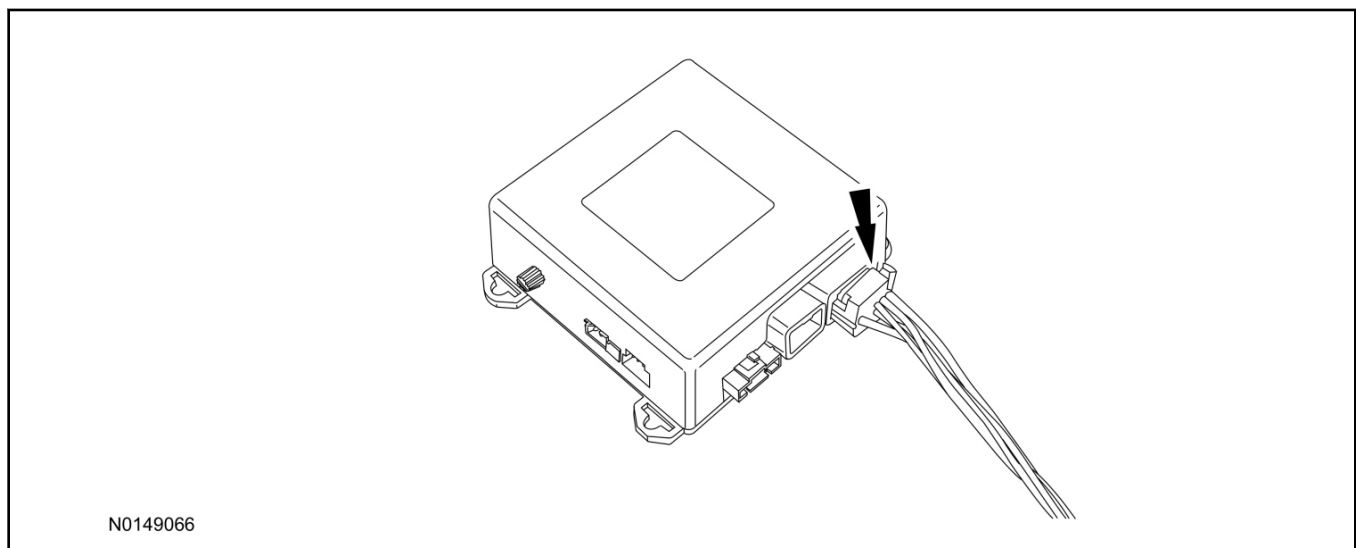

INSTALLATION (Continued)**Optional Security Indicator LED Mounting****⚠ CAUTION:**

Carefully route and secure module and harnesses so that they do not interfere with moving parts or linkages.

11. Keep the following points in mind when routing or positioning the LED for mounting:
 - Have at least 3/4" clearance behind trim panels for the wiring harness to be routed.
 - The LED should be clearly visible from the driver's side window when mounted.
 - Do not mount the LED on trim panels that cover air bags.
12. Mount the LED at an appropriate location on the upper steering column shroud, using the guidelines listed above.
 - Drill a 9/32" hole into the selected location, for the LED to mount in.
13. Route the LED wire harness to the VSS module.
14. Connect the LED wire harness to the VSS module 2-pin white connector.
 - Secure the LED wire harness with tie-straps.

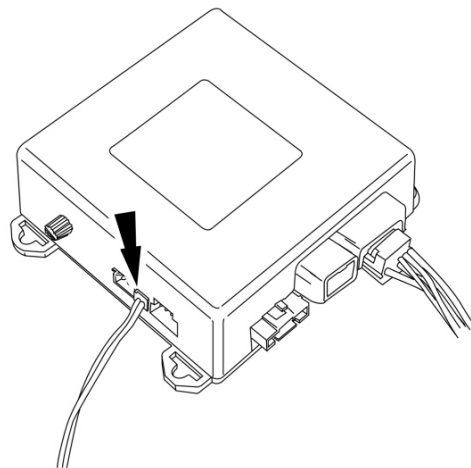

N0151367

INSTALLATION (Continued)

Learn VSS to Vehicle (Push Button Start Vehicles Only)

15. Cycle door locks at trim switch four times to learn remote start keyless functions.


Learn VSS to Vehicle (Key Start Vehicles Only)**NOTE:**

Make sure the brake pedal is not depressed during this sequence.

16. Press the vehicle's unlock button located on the driver's door. Make sure all doors are unlocked.
17. Put the key in the ignition.
18. Cycle eight times rapidly (within 10 seconds) between the 1 (OFF/LOCK) position and 3 (ON) position.
 - The eighth turn must end in the 3 (ON) position. The doors will lock, then unlock, to confirm that the programming mode has been activated.
19. Wait for 10 seconds and the remote start module will program itself to the system.
 - After 20 seconds, you will automatically exit the programming mode. The doors will lock, then unlock, to confirm that the programming mode has been exited.
20. If equipped with additional accessories (i.e. RF keypad), verify that they maintain all functionality post installation.

INSTALLATION (Continued)**Shock Sensor Sensitivity Adjustment****NOTE:**

The VSS module is equipped with an internal dual zone Shock Sensor. The VSS system will activate a single horn honk/single light flash anytime a light to moderate impact is detected, and a "panic" type 30 second horn honk/light flash sequence when a heavy impact is detected while the VSS system is armed. Adjustment of both zones is accomplished through a single adjustment knob on the VSS module. Rotating the knob clockwise will increase sensitivity and rotating the knob counter-clockwise will decrease sensitivity. Sensitivity adjustment must be completed with the module securely mounted and the adjustment knob accessible.

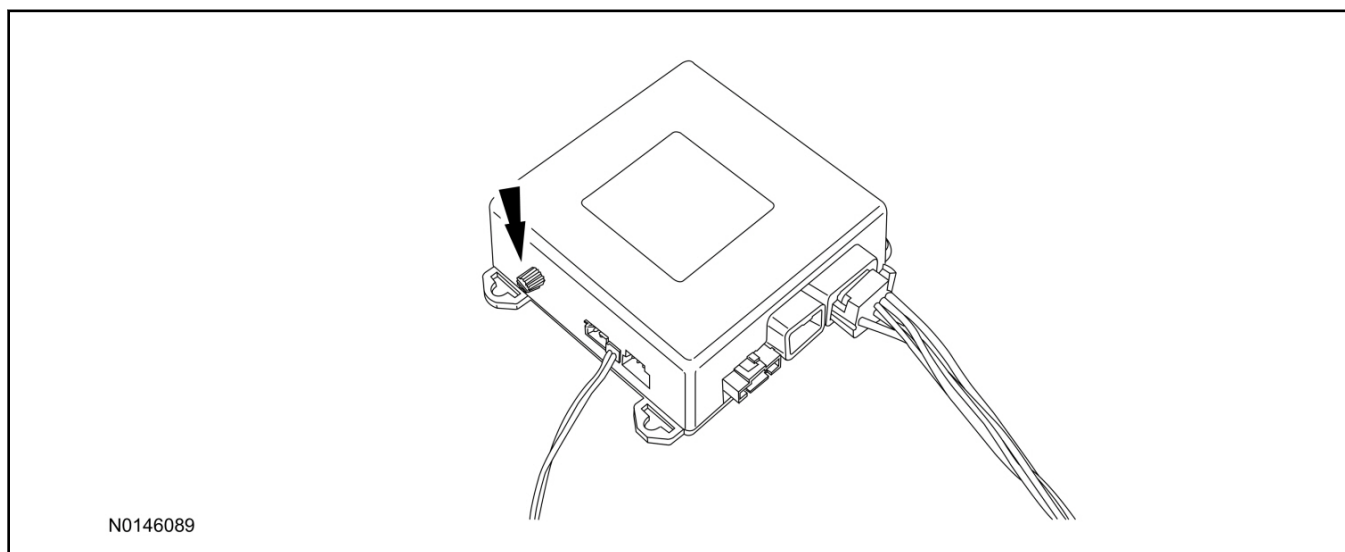

21. Starting with the adjustment knob in approximately the halfway position, lower the driver's window and exit the vehicle.
22. Press the LOCK button on the vehicle's RKE fob to arm the VSS system. The LED will light solid for 20 seconds and then begin to flash a steady on/off sequence to indicate the system is armed.
23. Using a closed fist, impact the steering wheel with moderate force to simulate a light impact on the vehicle. If the impact is detected, the horn will honk and the lights will flash 1 time to indicate the warning impact was detected.
24. Using a closed fist, impact the steering wheel with heavy force to simulate a hard impact (i.e. glass breakage) on the vehicle. If the impact is detected, the horn will honk and the lights will flash a steady on off sequence to indicate the heavy or full shock trigger was detected.
25. Increase (rotate clockwise) or decrease (rotate counter-clockwise) the adjustment knob as necessary to achieve desired sensitivity, repeat the previous steps to test, and verify adjustment.
26. If vehicle will not be upgraded to Remote Start or Remote Access functions at this time, install the LH Instrument Panel (IP) side finish panel.

INSTALLATION (Continued)**VSS Functional Test****NOTE:**

If installed, observe the LED while performing these tests.


27. Lower the driver's door window, then close all doors, hood, and trunk/hatch and press lock on the keyfob. The LED should stay lit for 20 seconds while the VSS system pre-arms, after which it will flash every 3-4 seconds in fully armed mode.
28. Reach inside the window hit the door unlock trim switch. The LED should continue to flash, indicating that the vehicle is still armed. Use the inside driver's door handle to open the door. The alarm should sound, indicating perimeter breach. Turn the alarm off by turning the ignition to "On".
 - If equipped with OE perimeter security, there will be a 12 second interior chime prior to alarm sounding. For vehicles not equipped with OE perimeter security, there will be a 12 second delay with no interior chime prior to alarm sounding.
29. Exit the vehicle and arm it again, this time leaving the driver's door open. The vehicle should arm itself, ignoring the open door but monitoring the rest. Once the vehicle is armed, shut the driver's door and reopen it after a few seconds. The alarm should sound. Turn the alarm off by hitting unlock on the keyfob.
30. Test all other vehicle doors, the hood and the trunk in the same manner, by setting off the alarm and disarming with the keyfob.
31. **Please contact 1-800-FORD-KEY with any issues regarding hardware or kit contents.**


II. Remote Start (RMST) Upgrade - Antenna Kit "Sold Separately"**CAUTION:**

Carefully route and secure module and harnesses so that they do not interfere with moving parts or linkages.

NOTE:

Verify that the vehicle has a hood switch Installed. If the vehicle is not equipped with a hood switch refer to "**Hood Switch Kit - Sold Separately**".

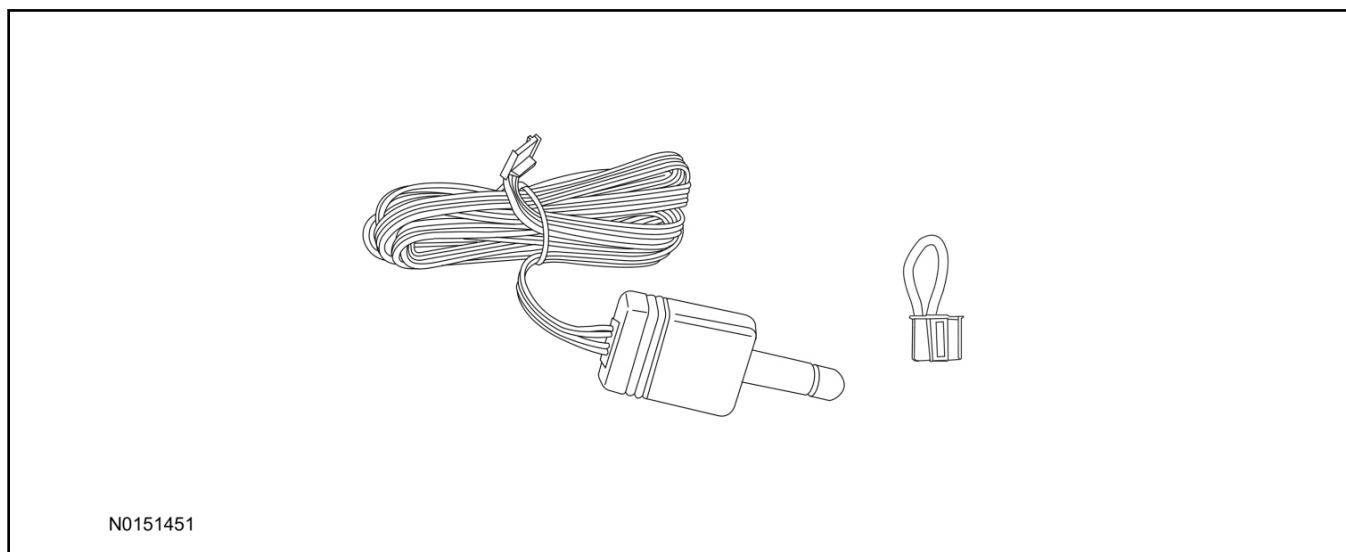


INSTALLATION (Continued)**Standard Key Fob (15K601) "Sold Separately"**

N0151499

Bi-directional Key Fob (15K601) "Sold Separately"

N0162473

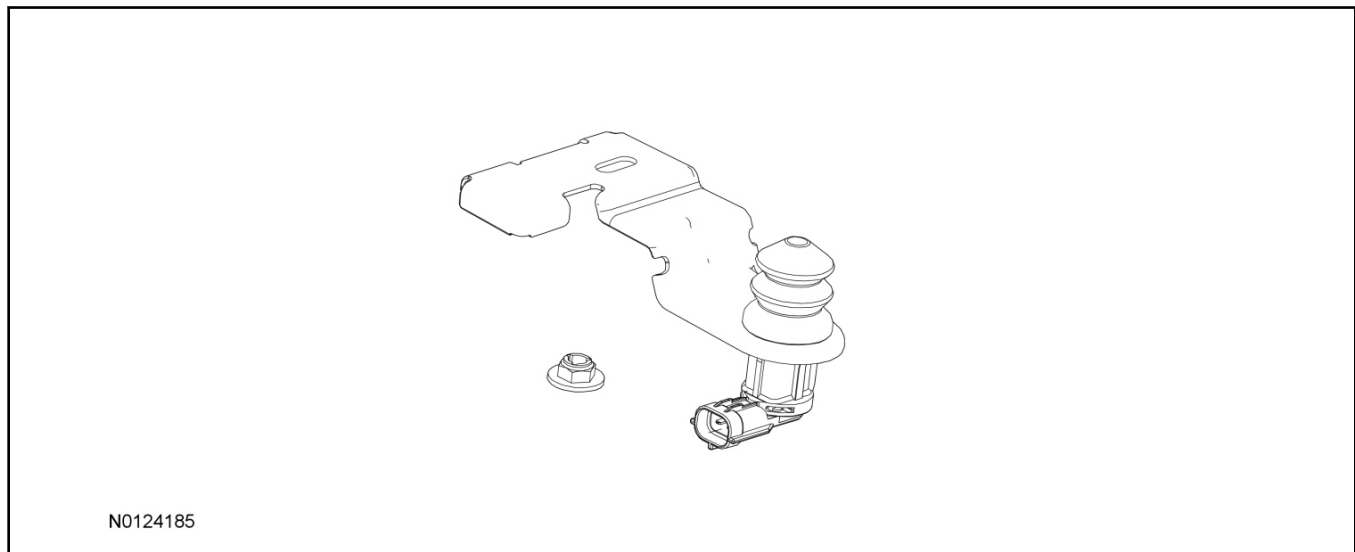INSTALLATION (Continued)**Hood Switch Kit (19G366) - SE Vehicles Only "Sold Separately"****Optional RMST Upgrade Components "Sold Separately"**

32. Review the RMST Upgrade components.

Remote Start (RMST) Upgrade - Antenna Kit "Sold Separately"

QUANTITY	DESCRIPTION
1	Bi-directional Antenna (TBD)
1	Security Jumper (TBD)

Standard Key Fob (15K601) "Sold Separately"

QUANTITY	DESCRIPTION
1	Standard Key Fob (15K601)

Bi-directional Key Fob (15K601) "Sold Separately"

QUANTITY	DESCRIPTION
1	Bi-directional Key Fob (15K601)

Hood Switch Kit Contents (if required) "Sold Separately"

33. Review the Hood Switch kit contents.

Hood Switch Kit "Sold Separately"


QUANTITY	DESCRIPTION
1	Nut
1	Hood Switch Assembly

Hood Switch Kit - "Sold Separately"**NOTE:**

Hood switch installation is optional for VSS installation and required if the vehicle is being upgraded to RMST/RMU and is not currently equipped with a hood switch.

INSTALLATION (Continued)

34. Locate the hood switch electrical connector located on the coolant reservoir.
- Disconnect the hood switch electrical connector from the coolant reservoir retainer plug.
35. Install the Hood switch assembly.
- Install the nut.
 - Tighten to 6 Nm (53 lb-in).

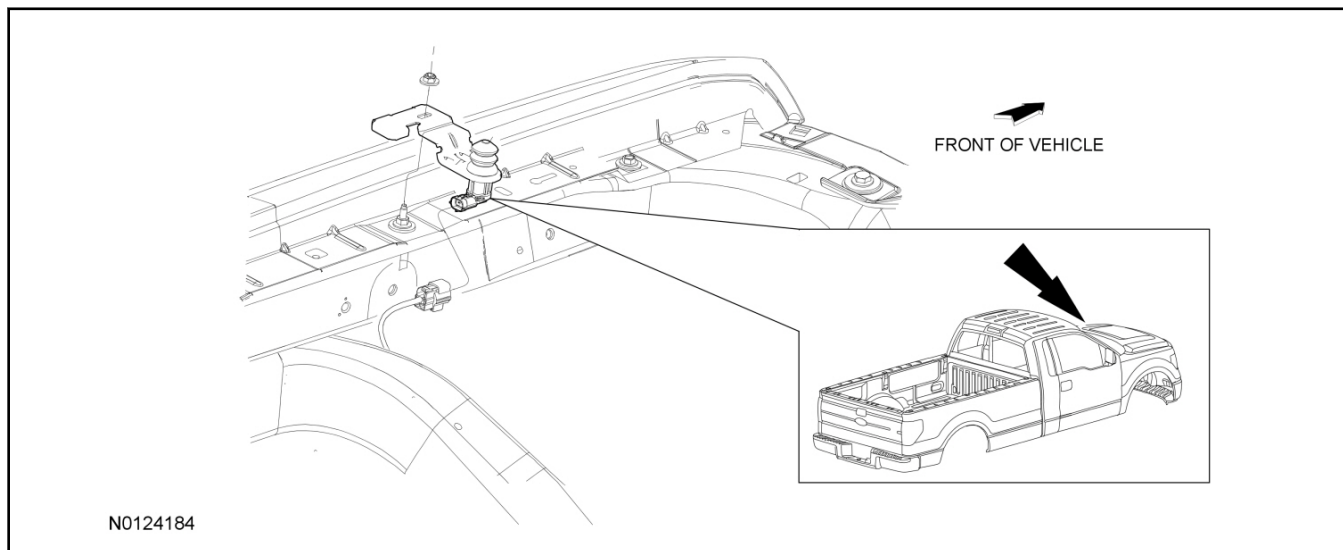


36. Connect the electrical connector to the hood switch.

TPM Antenna Kit Installation**NOTE:**


The TPM Antenna Kit is only required if the vehicle is not equipped with Factory remote start.

37. Remove the RH IP side finish panel.

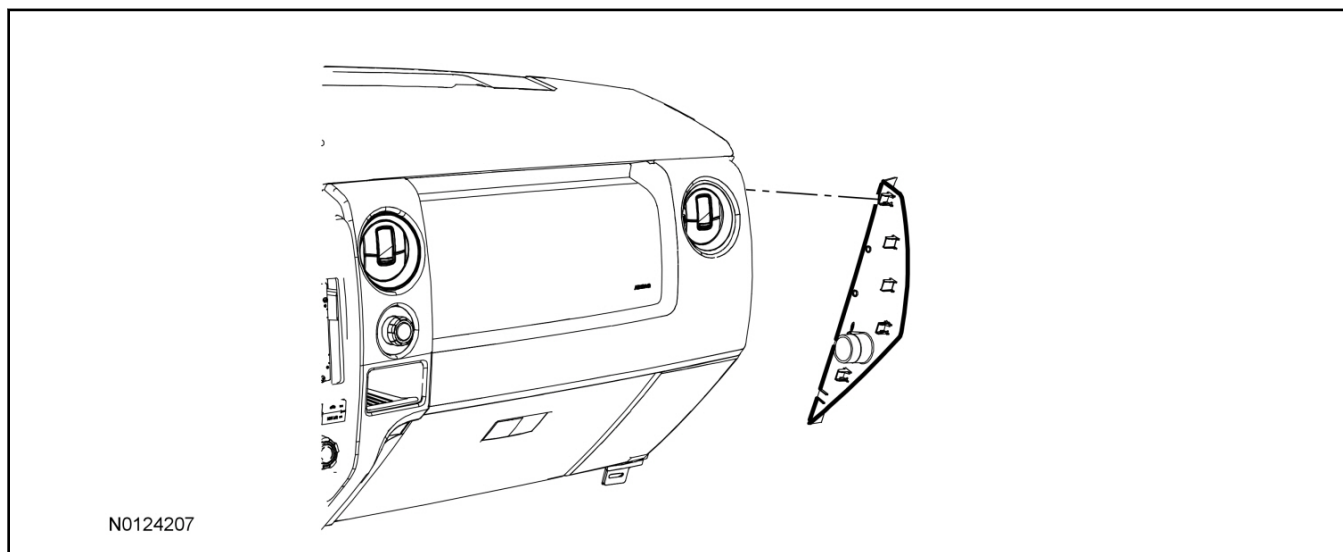


INSTALLATION (Continued)

38. Open the glove compartment.
39. Push in the 2 side tabs and fully lower the glove compartment.
40. Locate the Tire Pressure Monitor (TPM) Module.

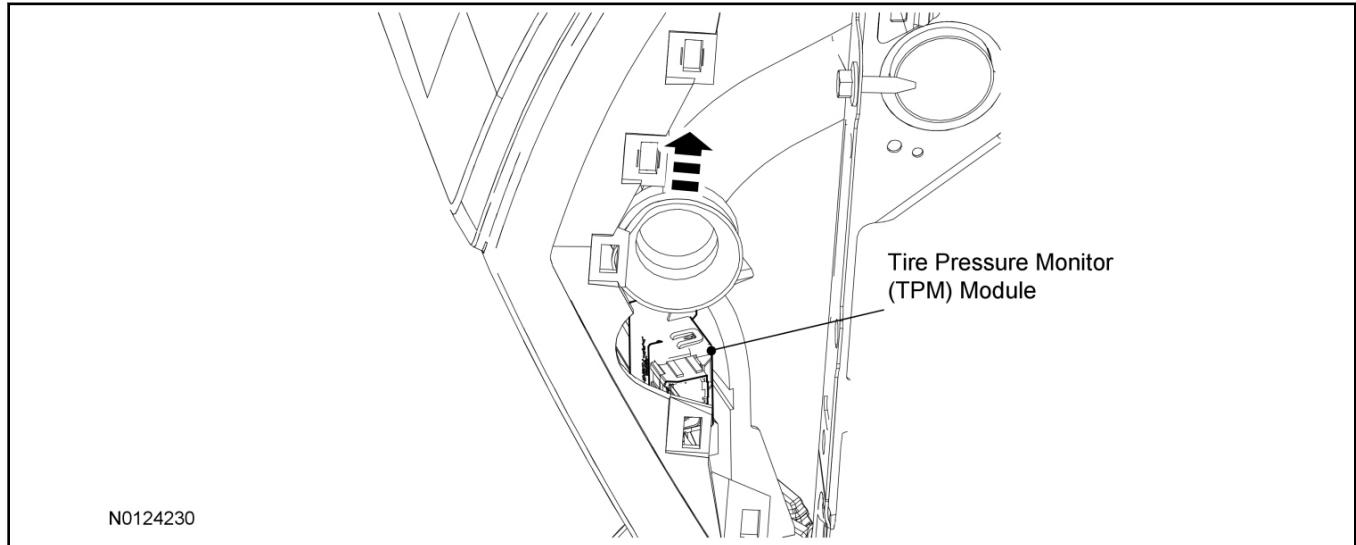


41. Position the A/C duct to access the TPM module electrical connectors.

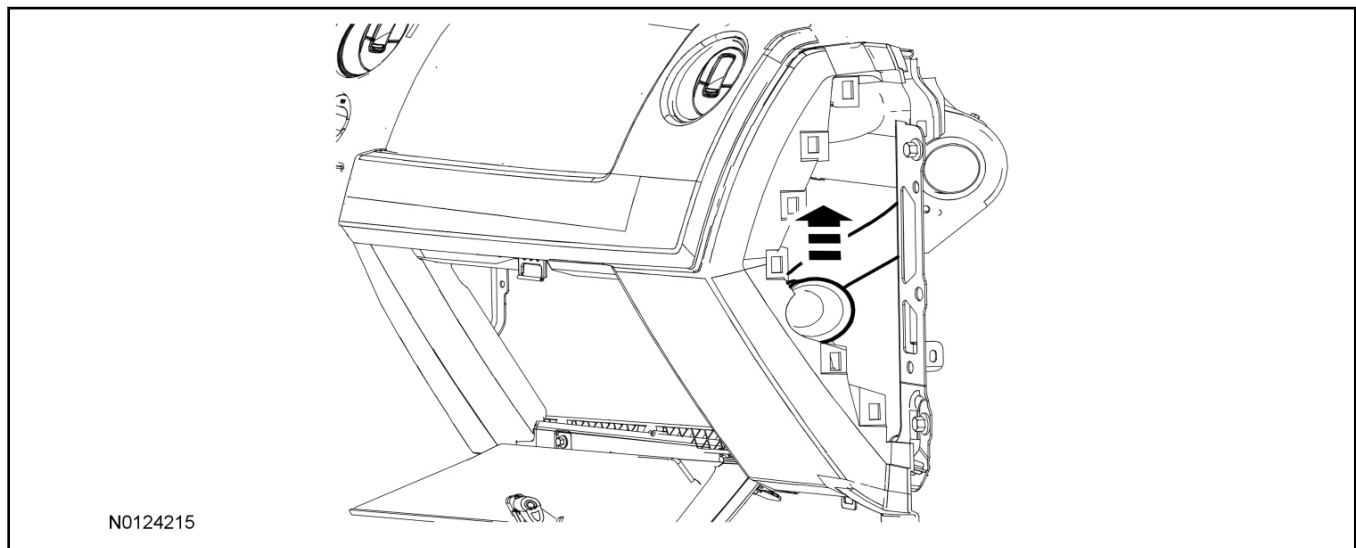

INSTALLATION (Continued)

42. Connect the antenna jumper wire to the TPM module.

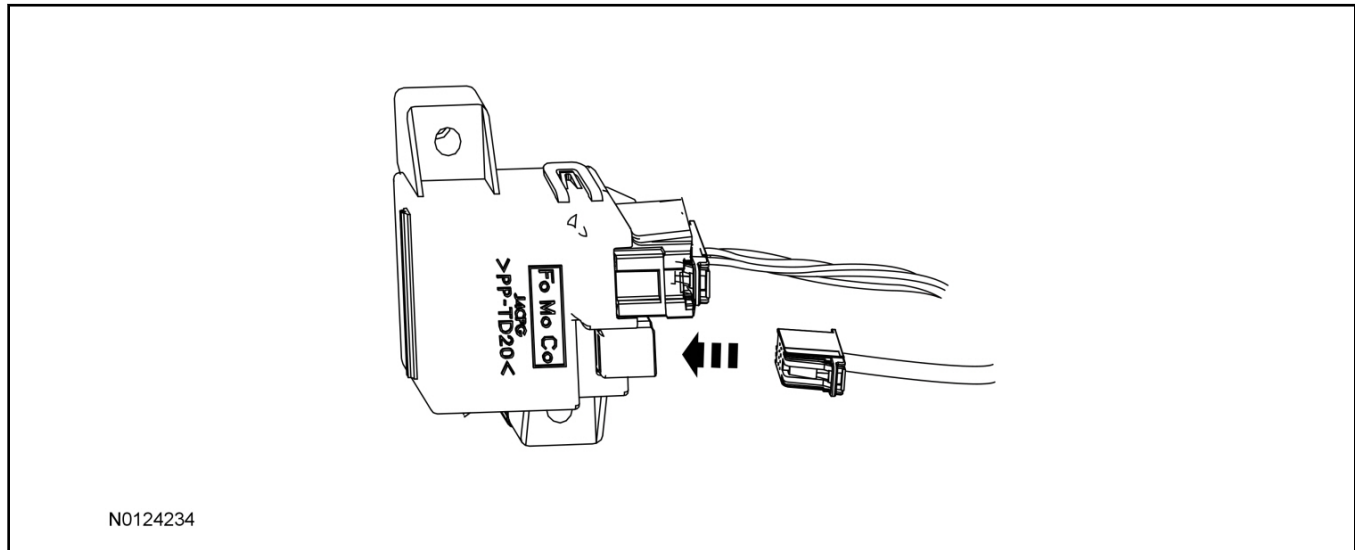


43. **NOTE:**

View is from inside the instrument panel glove box area.

Secure the antenna module to the glove box frame on top of the existing antenna module brackets.

- Secure the antenna module with tie straps through the existing bracket holes.

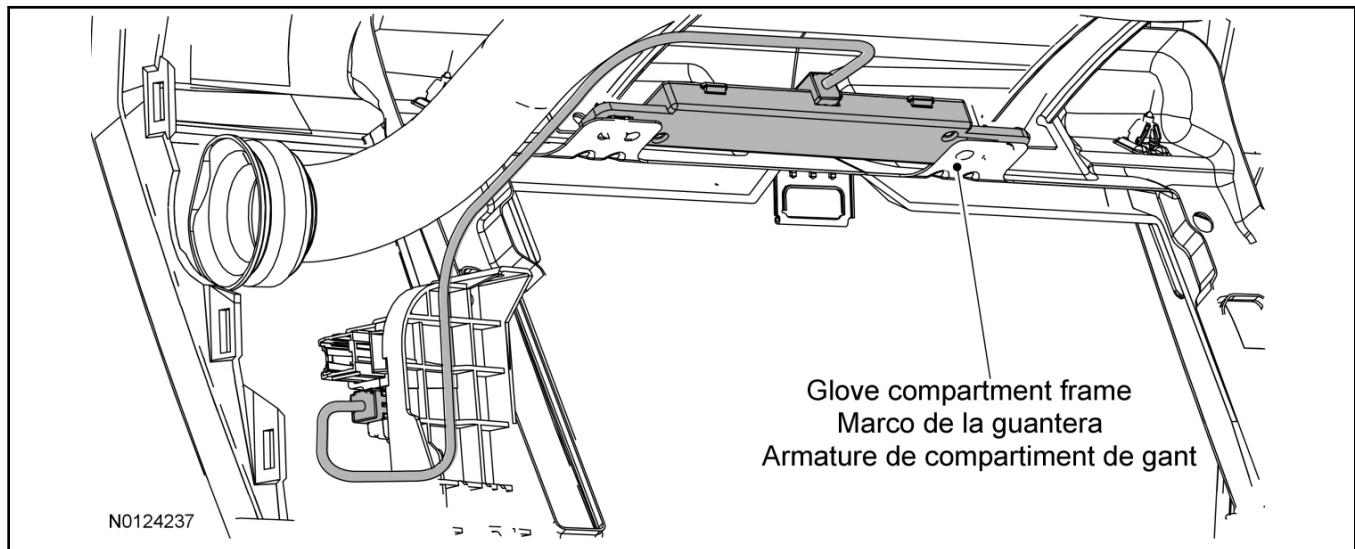

44. Connect the antenna jumper wire connector to the antenna module.

- Secure with tie straps.
- The push pins on the antenna jumper wire are not used for this application.

45. Position the A/C duct back to its original position.

INSTALLATION (Continued)**46. NOTICE:**

While closing the glove compartment make sure that the TPM harness and antenna harness do not come in contact with the glove compartment door.

Close the glove compartment.

47. Install the RH IP side finish panel.**RMST Kit Antenna Installation****48. If previously installed, remove the LH IP side finish panel.****49. Clean the antenna mounting surface using an alcohol base solution and a clean cloth.****50. NOTE:**

Do not touch the adhesive, reduced adhesion may result.


NOTE:

Make sure that the long wire on the antenna is pointing towards the top of the windshield since this wire will be routed along the headliner.

NOTE:

The wire will be attached to the control module later in this procedure.


Remove the protective backing from the adhesive on the antenna and firmly press the body of the antenna onto the mounting surface.

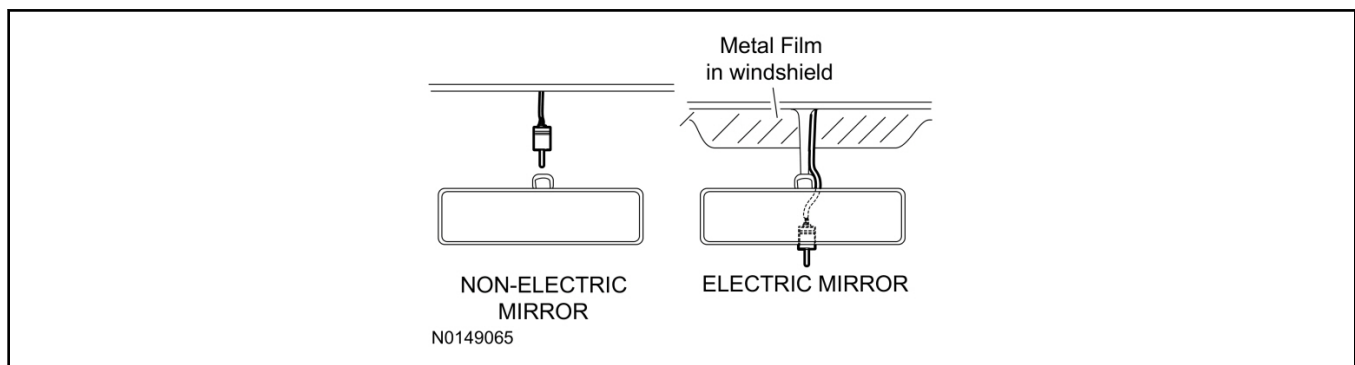**51. If necessary, position the A-pillar trim slightly outward to provide access to route the antenna wire. For additional information, refer to Workshop Manual (WSM) Section 501-05.****NOTE:**

Do not route the antenna wire over the top of air bags.

52. Route the antenna cable along the headliner and down the A-pillar towards the floor. Continue routing the wire into the IP towards the VSS module.


- Secure with tie-straps.

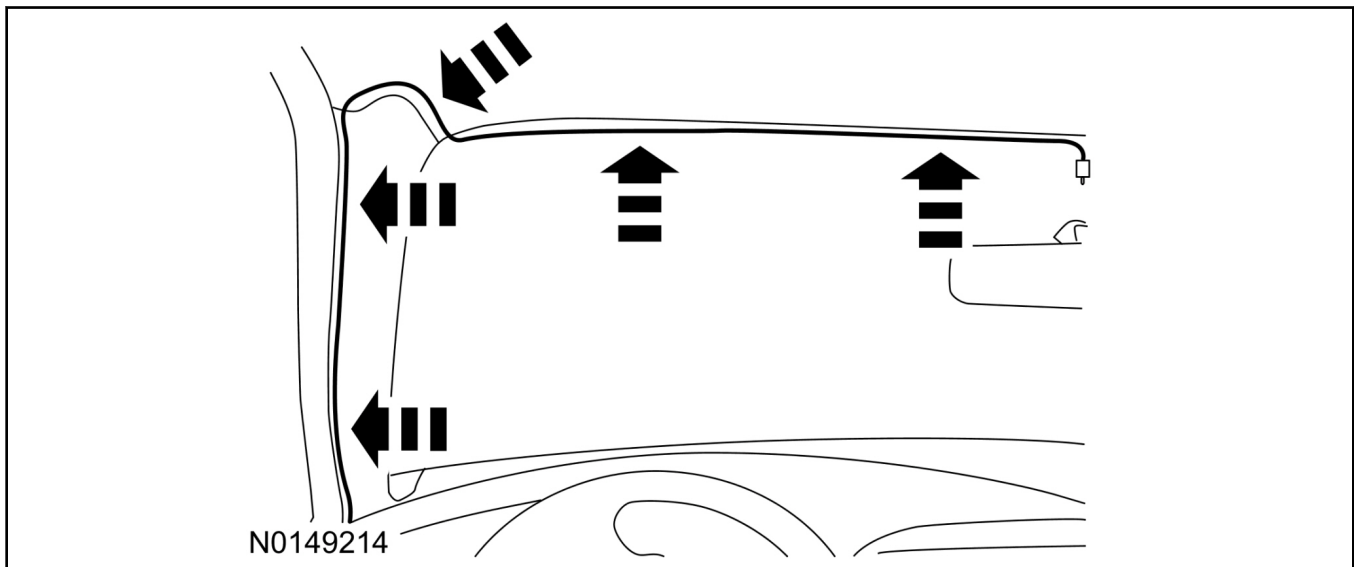INSTALLATION (Continued)

53. Connect the antenna connector to the VSS module.
54. Reposition the A-pillar trim panel back, if necessary. For additional information, refer to WSM Section 501-05.
55. If the RMST kit will not be upgraded to Remote Access functions at this time, install the LH IP side finish panel.

VSS Module - Optional Vehicle Security Features

56. Enable/Disable Vehicle Security Features:
Locate the security jumper supplied in the kit.
 - Install the jumper to the VSS module if the vehicle security features are to be **disabled**.
 - Not installing and/or removing the jumper from the VSS module will keep the vehicle security features **enabled**.

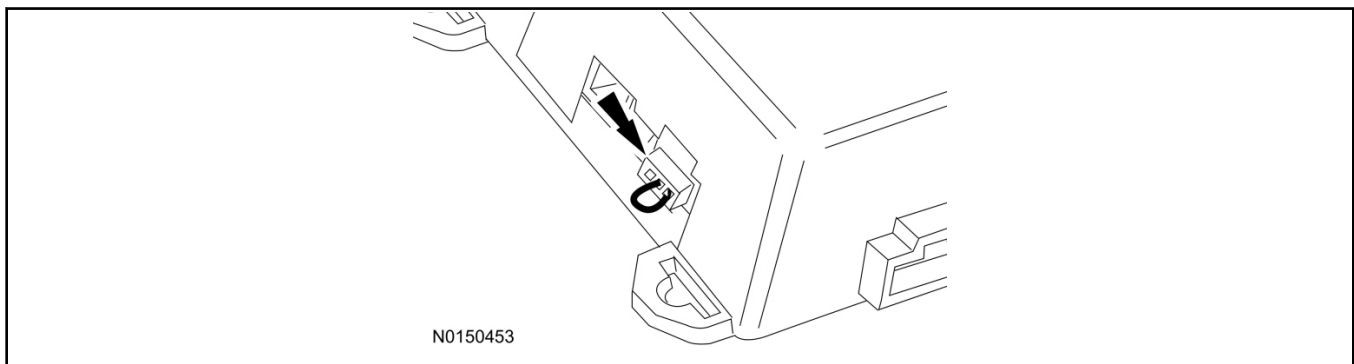**RMST Activation**

57. Verify that the IDS is updated to the most current version.
58. Connect IDS.
 - Follow the prompts to select new vehicle session.
 - Enter VIN.

INSTALLATION (Continued)

59. Activate the remote start using the IDS.

- Select the Tool Box icon.
- Select Body.
- Select Security.
- Select Remote Start.
- Verify that the information on the IDS screen is correct and all procedures have been followed.
- Select Yes. This will enable the remote start function on the vehicle.

60. For vehicles equipped with standard message center, verify that the remote start option now appears.

- Using the Select and Arrow buttons on the steering wheel, select Settings.
- Select Convenience.
- Select Remote Start.
- Select System.
- Verify that the remote start system is checked.

61. For vehicles equipped with advanced message center, verify that the remote start option now appears.

- Using the Select and Arrow buttons on the steering wheel, select Settings.
- Select Vehicle Settings.
- Select Vehicle.
- Select Remote Start System.
- Verify that the remote start system is enabled.

Learn Remote Start to Vehicle (Push Button Start Vehicles Only)

62. Cycle door locks at trim switch four times to learn remote start keyless functions.

Learn Remote Start to Vehicle (Key Start Vehicles Only)**NOTE:**

Make sure the brake pedal is not depressed during this sequence.

63. Press the vehicle's unlock button located on the driver's door. Make sure all doors are unlocked.


64. Put the key in the ignition.

65. Cycle eight times rapidly (within 10 seconds) between the 1 (OFF/LOCK) position and 3 (ON) position.

- The eighth turn must end in the 3 (ON) position. The doors will lock, then unlock, to confirm that the programming mode has been activated.

INSTALLATION (Continued)

66. Wait for 10 seconds and the remote start module will program itself to the system.
- After 20 seconds, you will automatically exit the programming mode. The doors will lock, then unlock, to confirm that the programming mode has been exited.
67. If equipped with additional accessories (i.e. RF keypad), verify that they maintain all functionality post installation.

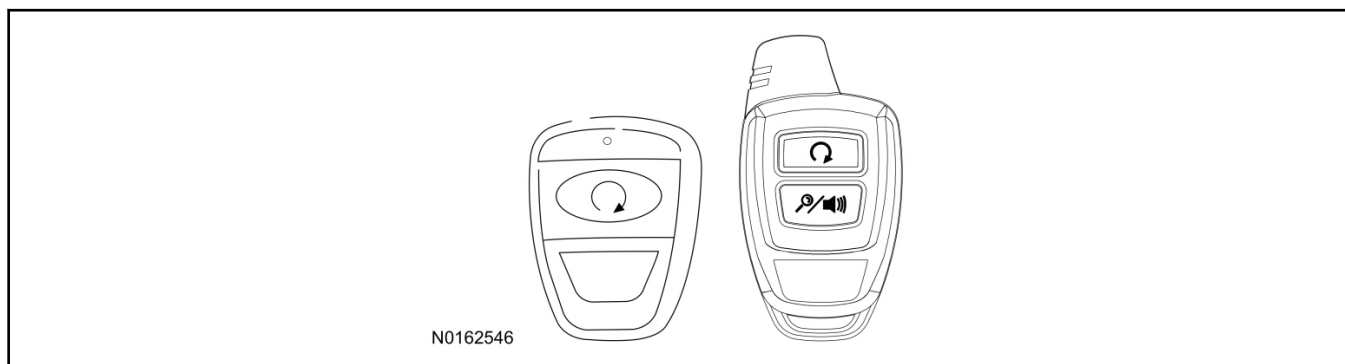Programming Key Fobs**68. NOTE:**

These steps must be performed with the VSS module security jumper removed if previously installed. For additional information refer to "VSS Module - Optional Vehicle Security Features".

- 1 Start with doors unlocked
- 2 Driver's door open (remaining open throughout)
- 3 Verify that the gearshift lever is in the "PARK" position.
- 4 Depress and hold brake pedal.
- 5 Start with ignition key OFF.
- 6 Cycle ignition key to the ON then OFF position 5 times, then back to the ON position a 6th time.
 - The horn will honk 3 times to indicate transmitter learn mode access.
- 7 Press the START button on each transmitter you wish to program. The horn will honk 1 time each time the START button is pressed to indicated the transmitter has been learned.
- 8 Cycle ignition key to the OFF position to exit transmitter learn mode.

9 NOTE:

If the security jumper is installed the vehicle security features are disabled.

If previously removed, reinstall the VSS module security jumper. For additional information, refer to "VSS Module - Optional Vehicle Security Features".

RMST Functional Test**NOTE:**

Do not put a key in the ignition for the following steps.

69. Make sure the shift lever is in PARK and the ignition is in the OFF position. Remove all keys from the vehicle.


INSTALLATION (Continued)

70. Close the hood.
71. Close all of the vehicle doors.
72. Start the vehicle by pressing the remote start button twice on the remote start key fob.
73. Confirm the remote start works with the vehicle in park and with the hood and doors closed.
74. Open the hood.
75. **NOTE:**
Vehicle doors should be closed while performing this step.

Confirm that the vehicle will not start with the hood open.

Please contact 1-800-FORD-KEY with any issues regarding hardware or kit contents.

76. See the Scalable Remote Start System Diagnosis Guide to resolve issues identified by the functional test.

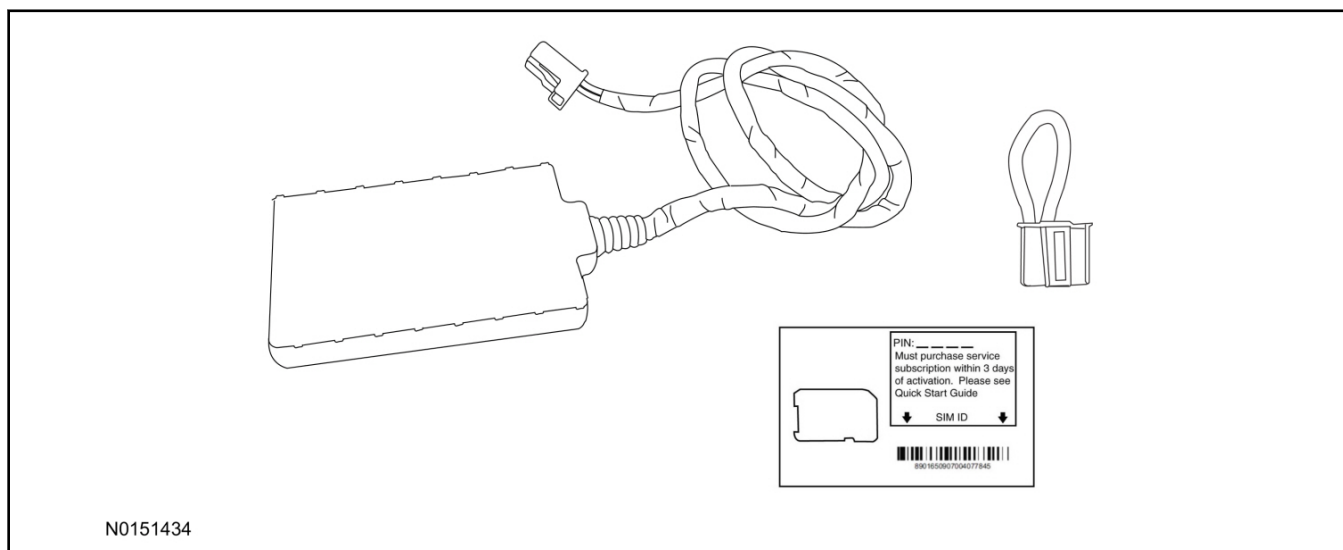III. Remote Access (RMU) Upgrade "Sold Separately"

77. Review the RMU upgrade components.

Optional Components — Remote Access (RMU) Upgrade "Sold Separately"

QUANTITY	DESCRIPTION
1	Remote Messaging Unit (RMU)
1	SIM Card Carrier
1	Security Jumper

⚠ CAUTION:

Carefully route and secure module and harnesses so that they do not interfere with moving parts or linkages.


NOTE:

For proper range of operation, the RMU must be installed as shown in the diagram below.

78. If previously installed, remove the LH IP side finish panel.


INSTALLATION (Continued)

79. Using tie-straps secure the RMU to the A/C duct behind the LH IP side finish panel.

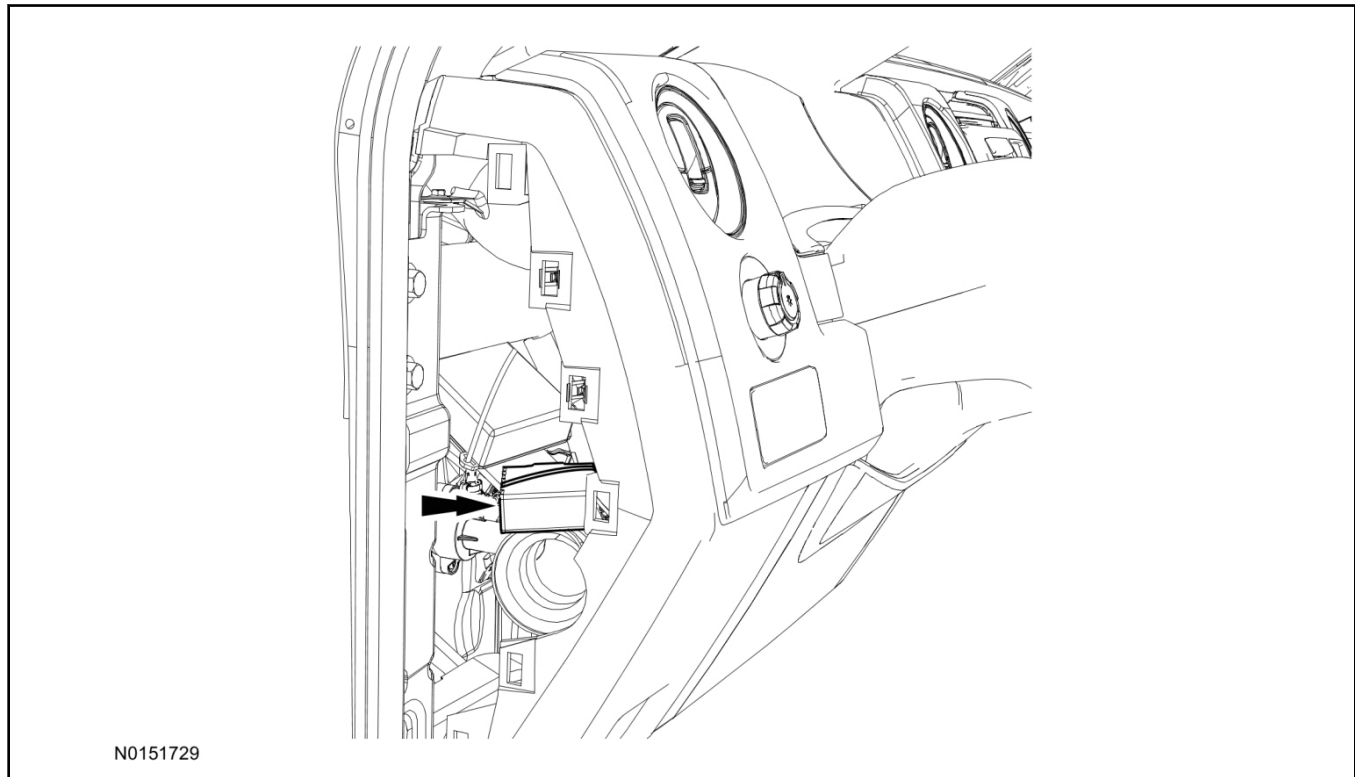


80. Connect the RMU electrical connector to the VSS module.

- Secure the harness with tie-straps.

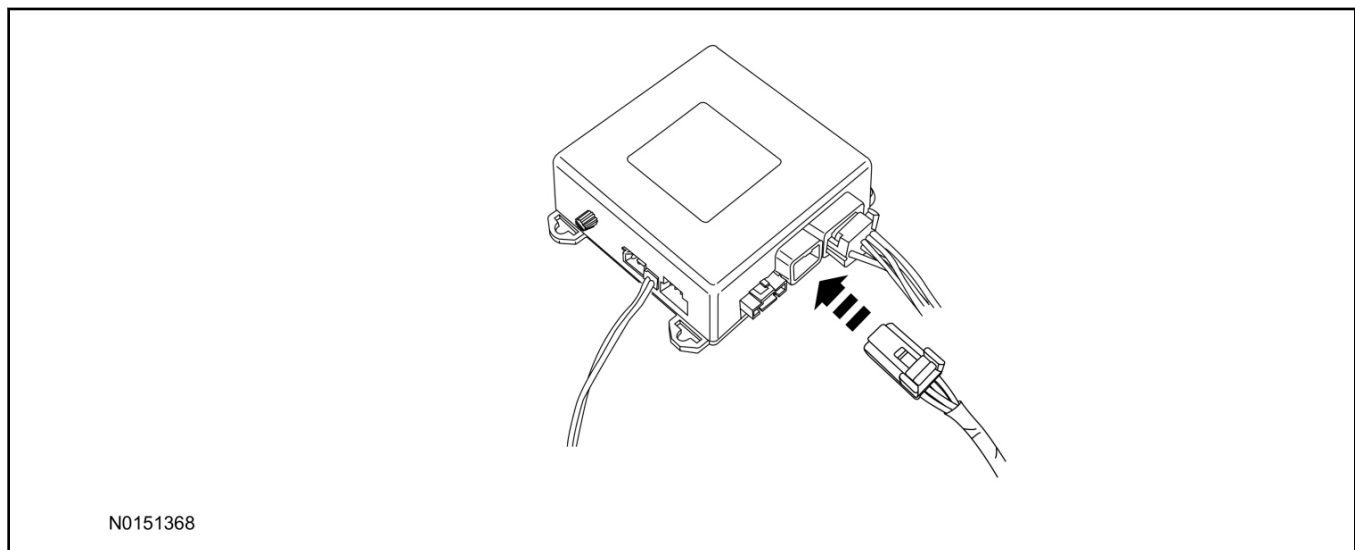**VSS Module - Optional Vehicle Security Features**

81. Enable/Disable Vehicle Security Features:
Locate the security jumper supplied in the kit.

- Install the jumper to the VSS module if the vehicle security features are to be **disabled**.
- Not installing and/or removing the jumper from the VSS module will keep the vehicle security features **enabled**.

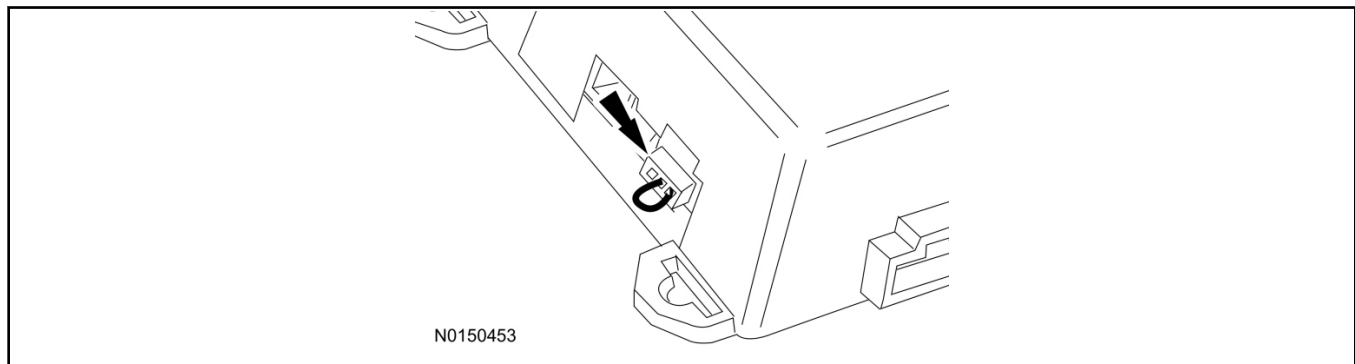INSTALLATION (Continued)

82. Install the LH IP side finish panel.

Remote Start Activation - (Without Factory Remote Start)

83. Verify that the IDS is updated to the most current version.

84. Connect IDS.

- Follow the prompts to select new vehicle session.
- Enter VIN.

85. Activate the remote start using the IDS.

- Select the Tool Box icon.
- Select Body.
- Select Security.
- Select Remote Start.
- Verify that the information on the IDS screen is correct and all procedures have been followed.
- Select Yes. This will enable the remote start function on the vehicle.

86. For vehicles equipped with standard message center, verify that the remote start option now appears.

- Using the Select and Arrow buttons on the steering wheel, select Settings.
- Select Convenience.
- Select Remote Start.
- Select System.
- Verify that the remote start system is checked.

87. For vehicles equipped with advanced message center, verify that the remote start option now appears.

- Using the Select and Arrow buttons on the steering wheel, select Settings.
- Select Vehicle Settings.
- Select Vehicle.
- Select Remote Start System.

INSTALLATION (Continued)

- Verify that the remote start system is enabled.

Learn Remote Start to Vehicle (Push Button Start Vehicles Only)

88. Cycle door locks at trim switch four times to learn remote start keyless functions.

Learn Remote Start to Vehicle (Key Start Vehicles Only)**NOTE:**

Make sure the brake pedal is not depressed during this sequence.

89. Press the vehicle's unlock button located on the driver's door. Make sure all doors are unlocked.

90. Put the key in the ignition.

91. Cycle eight times rapidly (within 10 seconds) between the 1 (OFF/LOCK) position and 3 (ON) position.

- The eighth turn must end in the 3 (ON) position. The doors will lock, then unlock, to confirm that the programming mode has been activated.

92. Wait for 10 seconds and the remote start module will program itself to the system.

- After 20 seconds, you will automatically exit the programming mode. The doors will lock, then unlock, to confirm that the programming mode has been exited.

93. If equipped with additional accessories (i.e. RF keypad), verify that they maintain all functionality post installation.

RMU Activation**NOTE:**

Please note that the Remote Access application that is used to start the vehicle for this RMST kit will only work with iPhone and Android phones.

94. For RMU activation the following information from the customer is recommended to provide them with electronic notification for app retrieval:


- 1 Email Address
- 2 Cell Phone Number
- 3 Cell Phone Carrier Company

95. Log on to your Professional Technician Society (PTS) account and enter the vehicle information.


- 1 Select "Vehicle Id".
- 2 Select "By Year & Model"
- 3 Choose the year & model of the vehicle and then select "GO".
- 4 Hover over the "Workshop" tab.
- 5 Select the "Accessory Installation" menu item.
- 6 Under the "Electrical" heading, select the "Remote Access Activation" link (first time users will need to agree to terms & conditions).
- 7 Select the "Install or Diagnose" link.

INSTALLATION (Continued)**NOTE:**

If you are not directed to the screen shown below (or user agreement screen for first time users), make sure your internet browser zone settings are set to medium. This setting can be found in your browsers "internet options" under the "privacy" tab.

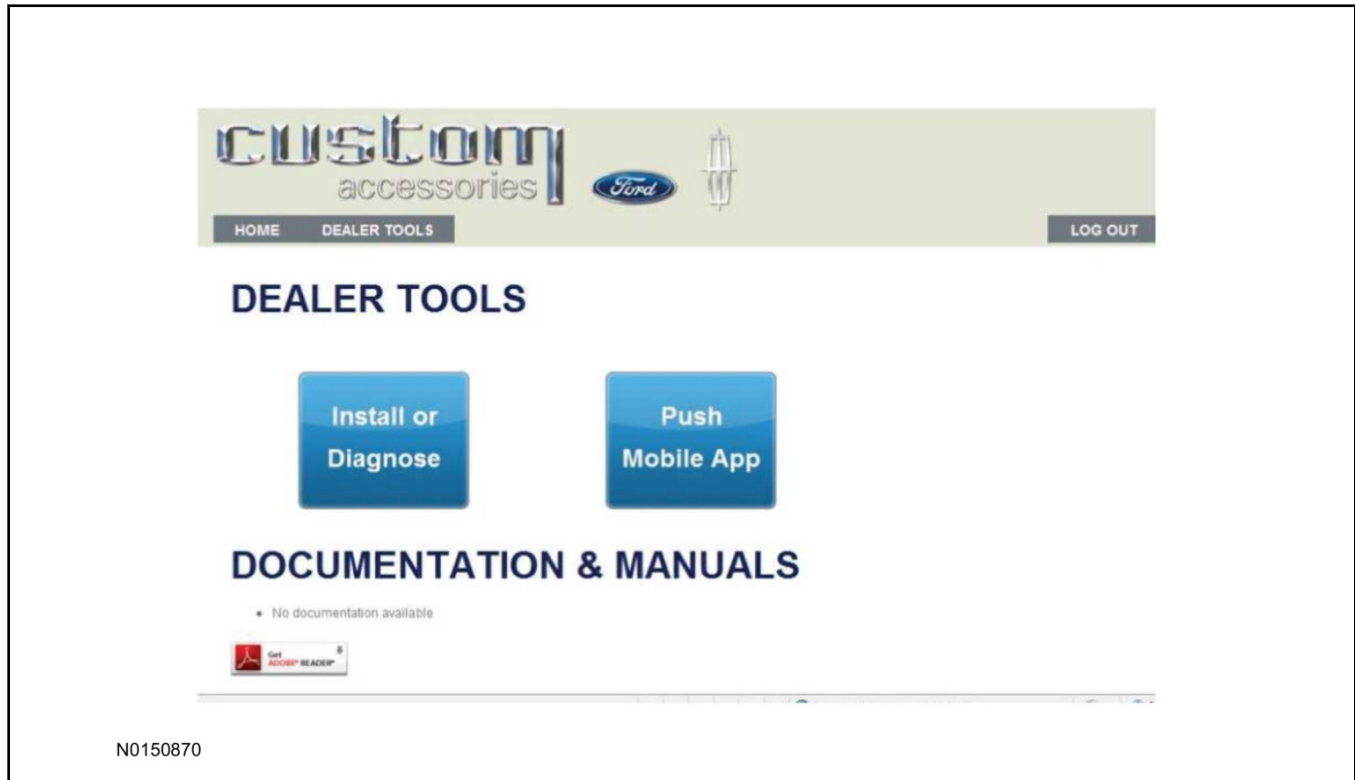

96. Once on the "Install" page, enter the SIM ID code that was provided with the RMST kit. Select "Begin or Continue Installation".

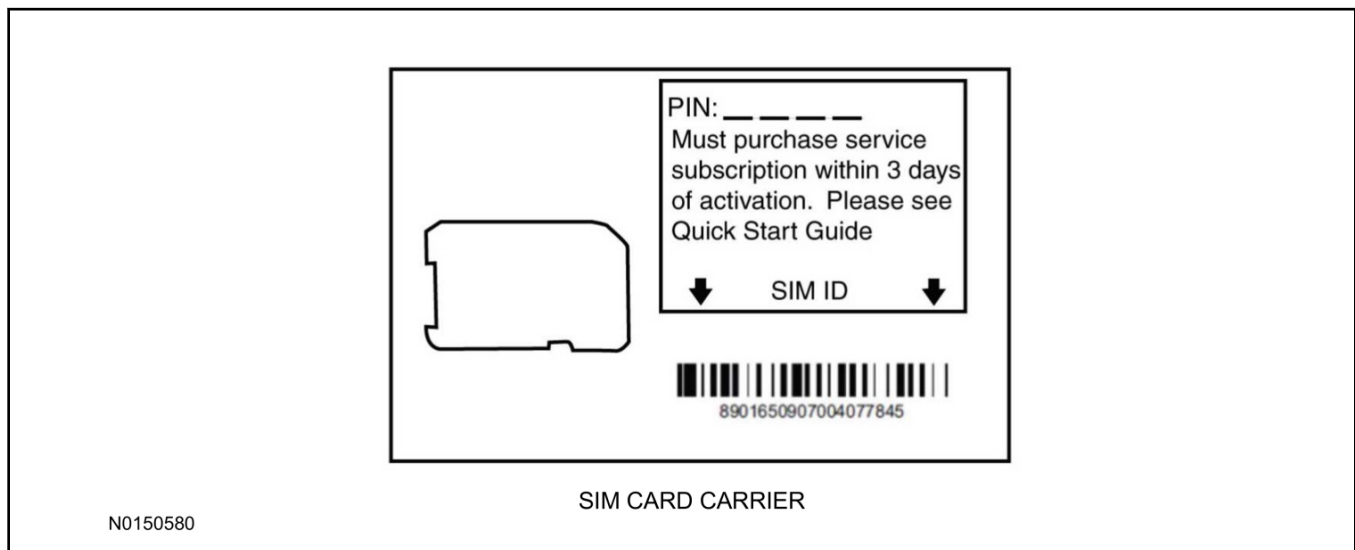

INSTALLATION (Continued)

97. Click on the "On screen steps 1-6", and follow the on screen instructions to complete the installation.

INSTALLATION INDEX



N0150454

INSTALLATION (Continued)**NOTE:**

The following step will complete the activation process, when you are directed to a screen similar to the one below ensure the correct vehicle brand is selected and that all applicable features are enabled.

NOTE:

The "perimeter" and "shock" settings below are optional features and should only be selected when security features are enabled.



The screenshot shows a software installation window titled "Installation Details". It contains the following elements:

- Brand:** A dropdown menu currently set to "Ford".
- Security Features:** A button with a circular arrow icon and the text "Requery".
- Feature List:** A vertical list of features, each with a checked checkbox:
 - Start
 - Stop
 - Lock
 - Unlock
 - Car Finder
 - Perimeter
 - Shock
- Navigation:** Two buttons at the bottom: "Return" (with a left-pointing arrow icon) and "Continue" (with a right-pointing arrow icon).
- Identifier:** The text "N0150305" is located at the bottom left of the window.

INSTALLATION (Continued)

98. Perform a functional check of the system by testing each of the available features.

- Start/Stop function
- Lock/Unlock function
- Car finder
- Signal (for troubleshooting only)

Installation Test

Session Status	✓	Yes
Network Connection	✓	Yes
IP Assigned	✓	10.64.17.233
Comm Established	✓	Yes
Received IMEI	✓	358901041730422
Received ESN	✓	1663000117

Your install has been tested successfully. If you would like to test the physical functions of the module, you can do so below.

N0150677

NOTE:

All tests above must be completed in order to move to the next step. If any of the listed functions fail, move the vehicle to an outside location and retest.

NOTE:

In the event start or stop fail, refer to the "Remote Start Activation" section in this manual.

NOTE:

In the event lock/unlock or car find fail, refer to the "Learn Remote Start System to Vehicle" section in this manual.

99. Once the hardware installation and RMU activation process is complete, record the 4-digit PIN on the SIM card carrier. Provide the SIM card carrier to the customer so they can add this system to their Remote Access Account. Customer must have both the 4-digit PIN and SIM ID to activate/add their vehicle to their Remote Access Account.

100. If the customer agrees, you may push the mobile application to the customer. You will need the customer's phone number and cellular carrier. If the customer opts to install the application themselves, they can locate it in their mobile app store.

Please contact 1-800-FORD-KEY with any issues regarding hardware or kit contents.